

# Intelligent controller for the highest efficiency and comfort



# LogoTronic Hub OTC

Efficient weather compensated room temperature control

- One outside temperature sensor and hub for transmission of the signal to up to 32 stations
- Easy signal forwarding via Modbus RTU (RS485 interface)
- Plug & play during commissioning
- Simple status visualization via 5 light-emitting diodes



### Be efficient as possible during the project realization & operation

The demand for weather-compensated solutions for heating supply via using Logotherm® Heat Interface Units is increasing and should be as simple and cost-efficient as possible. Therefore it is required to have a device which can transfer the outside temperature value to up to 32 installed Logotherm® Heat Interface Units. This is possible via the LogoTronic Hub OTC which simplifies the installation.

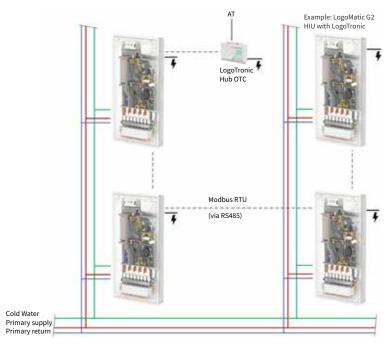


Fig. 1: LogoTronic Hub OTC in the system integration with several LogoMatic G2 Heat Interface Units.

#### **Outside temperature sensor**

The LogoTronic Hub OTC is delivered with an outside temperature sensor. This sensor transfers the outside temperature value to the LogoTronic Hub OTC which will distribute this information via Modbus RTU to the different installed Logotherm\* Heat Interface Units.



Fig. 2: LogoTronic Hub OTC

#### **Suitable Heat Interface Units**

Currently the LogoTronic Hub OTC is already available in combination with different Logotherm® Heat Interface Units such as the the LogoEco G2, LogoMatic G2, LogoEco G2 Dual and LogoEco HCW.



## LogoTronic Hub OTC

Intelligent controller for the highest efficiency and comfort

www.flamcogroup.com

#### **United Kingdom**

Flamco Limited Washway Lane St Helens, Merseyside WA10 6PB

**T** +44 (0)1744 744 744 **E** info@flamco.co.uk

#### The Netherlands

hydronic flow control Postbus 30110 1303 AC Almere Fort Blauwkapel 1 1358 AD Almere

**T** +31 (0)36 526 2300 **E** info@flamcogroup.com